


H.265 2M IP IR BULLET CAMERA VVK-NB242VZIR



Feature

- 1/2.8" 2M Sony Image Sensor IMX307
- 2.8~12mm DC Auto Iris Filter Removable
- Motorized Zoom Lens
- Digital Noise Reduction -2D,3D
- WDR
- Privacy Zone
- Motion Detection
- D-fog
- IR LED 42PCS(850nm)
- PoE support IEEE802.3af
- ONVIF Profile S

Dimension

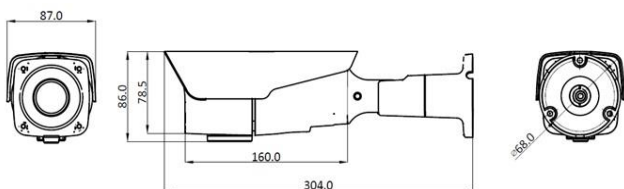

Specification

Camera	
Image Sensor	1/2.8" 2M Sony Image Sensor IMX307
Effective Pixels	1945(H) × 1097(V), 2.13 Mega Pixels
Scanning System	Progressive Scan
Privacy Mask Function	On / Off (4 Area Selection)
Motion Detection	On / Off
Electronic Shutter	Automatic: Min. Manual: Min. 1/30 sec ~ Max. 1/30,000 sec
Language	•ENGLISH •KOREA •JAPANESE •FRENCH •GERMANY
IR LED	Visible 5mm Diameter(850nm) × 42pcs
WDR	DOL True-WDR
White Balance	Manual / Auto / DayLight / Cloudy / Tungsten Sunset
Visibility Range	Outdoor 30M
Lens Type	2.8~12mm DC Auto Iris Filter Removable
Power Supply	DC 12V ± 10% / 1.0A
Power Consumption	DC 12V / 650mA
Operating Temp.	-10 °C ~ +50 °C
Operating Humidity	90%
Dimension	71(W) × 69(H) x 160(D)mm
Weight	Approx. 920(g)

Hardware

Ethernet Interface	RJ-45 (10/100 BASE-T)
PoE Support	IEEE 802.3af

Alarm(Optional)

In / Out	1 TTL inputs and 1 TTL output
----------	-------------------------------

Video

Resolution	1920x1080(Full-HD),1280x720(HD), 1024x576,768x432,704x392, 640x360,384x216
Max. Framerate	Up to 30fps@1920x1080p
Video Compression	H265, H264, Motion JPEG

Audio (OPTION)

Audio	Line In / Line Out
-------	--------------------

General

IP	IPv4
Protocol	TCP/IP, HTTP, RTP/RTSP,UDP, DHCP, FTP, SMTP, NTP, ARP, ICMP, DDNS, ONVIF
ONVIF	Yes

* Design and specifications are subject to change without notice..