


4K PC DVR CARD - V4K-1216

16ch UHD Compression Card for AHD,TVI,CVI and Analog cameras

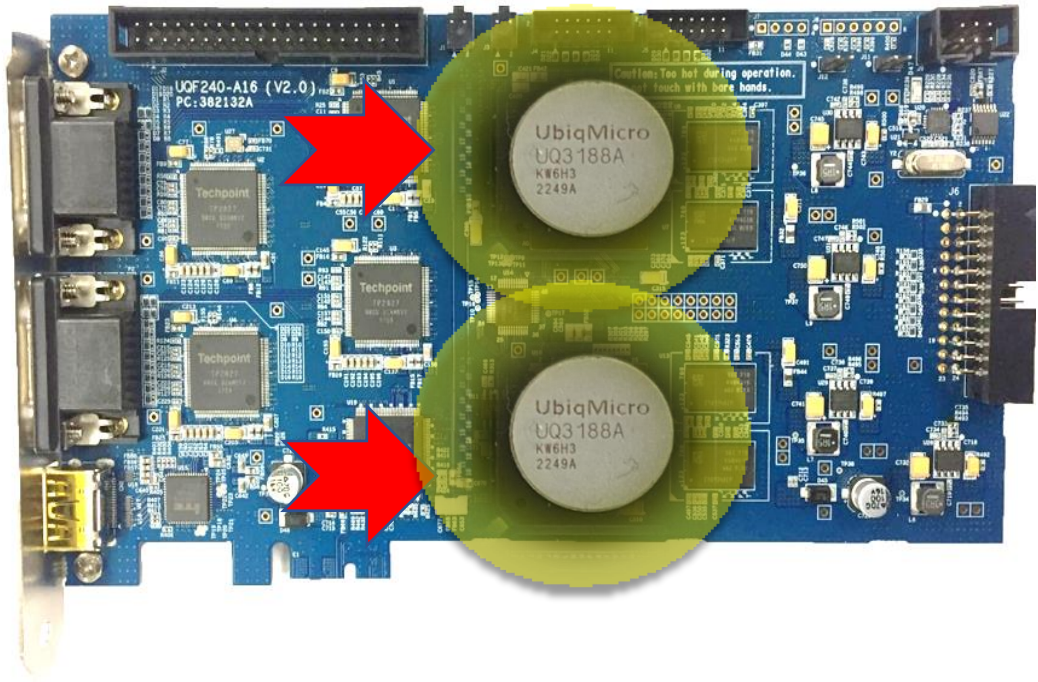

CoDec, UQ3188 chip major feature


H.264
MPEG-4/AVC

Video hardware compression chip (H.264 standard)

Dual-Stream First stream: 2160P , Second stream: VGA(640x480)



Fisheye Lens correction, panoramic view, and virtual PTZ view.



Encryptions Algorism(AES128, AES256, DES, 3DS)



V4K-1216 Features

- Video hardware compression card, based on H.264 standard; 8 CH Audio compression, but expandable to 16 CH with audio expansion card.
- 16 channel 2160P(7.5)/1080P(25,30)/720P(25,30,50,60) from all kinds of analog HD cameras (HD-TVI, HD-CVI, AHD, and analog cameras)
- Supporting up to UHD 2160P of 16 CH in real time live view
- 16 channel UHD video compression 2160P @ 120 fps + VGA(640x480) @ 240fps
- 8 channel G.711 audio compression, but up to 16CH audio with the expansion sub-card
- Support of motion detection, video loss, and camera masking function; support of OSD, logo overlay configurable video frame rate etc.
- Support of uncompressed video of Max UHD 2160P sized
- Support of 1 channel 1920*1080 HDMI output, plus 1 channel CVBS(NTSC/PAL(black and white) TV out.
- PCI-E x 1 lane port
- Two jumpers are provided. One(8X2) for audio expansion sub card.
The other (12X2) for sensor inputs and triggering output signals.
- SDK in Windows OS, or Linux OS (under going), suitable for the additional secondary developments.
- Support Fisheye Lens correction, panoramic view, and virtual PTZ view

Specifications

Model		HW video compression card for all Analog HD cameras
General	Encoder	The CoDec, UQ3188
	PCI Standard	PCI-Express 1.0x Gen2
	Multi-Card Operation	Support max 4 cards, leading to the applications of 64 Channels for a single PC.
	Sub Card	Additional 8 channel audio input(RCA), with an audio expansion sub card
Video	Input	BNC, 16 channel for all kinds of UHD cameras(HD-TVI, HD-CVI, AHD, and even analog cameras)
	Standard	2160P(7.5)/1080P(25,30)/720P(25,30, 50, 60)
	Preview Resolution	Max 2160P(3840×2160), sized, in real time; Support of main preview and sub preview
	Compression	H.264
	Encoding Resolution	Max 2160P(3840×2160) for each 16 CH, each 7.5 FPS
	Encoding Speed	Main Stream: 16CH X2160P X7.5FPS each, or 16ChX1080PX30FPS each,
		Extra Sub-Stream: Max 640x480 with Max 480 fps
	Bit Rate	256Kbps~10Mbps, each
	Compressed Stream	Main Stream + Sub-Stream
Output	1 channel HDMI (1920×1080). In addition, 1 CH CVBS(NTSC or PAL (Black and White)) TV out.	
	1/16 display split, with 4X4 configuration.	
Audio	Input	8 channel, RCA input and additional 8 more audio support with audio expansion sub card.
	Compression	PCM, G.711-A law, Mu law, ADPCM
	Sampling Rate	8, 16bit (8KHz, 16KHz, 32KHz, 44.1KHz)
	Bit Rate	Min 64 Kbps
Miscel	Camera setting over Coax	Supporting communication protocols for AHD/CVI/TVI cameras.
	Watch dog	Support in Hardware
System Requirement	Operating System	Windows 7/8/10, Linux
	CPU	Intel or AMD
	Motherboard	Based on Intel or AMD chipset, PCI-E slot
	Memory	8 GB or above
	Graphics	AMD, NVIDIA, Intel graphics cards.
Environmental	Working Environment	-10~+55°C / 10~90%RH / 86~106kpa
	Power Requirement	12V±10%, 3.3V±10%
	Power Consumption	15 W less
	Dimension	217 mm × 105 mm

VIVA CO., LTD.

#2~3F, 100, Cheongjung-ro, Bupyeong-gu, Incheon, South Korea (Zip Code: 21312)

Tel : +82-32-511-7730 / Fax : +82-32-511-7731 / Email: sales@vivako.com, jay@vivako.com, bsr@vivako.com